
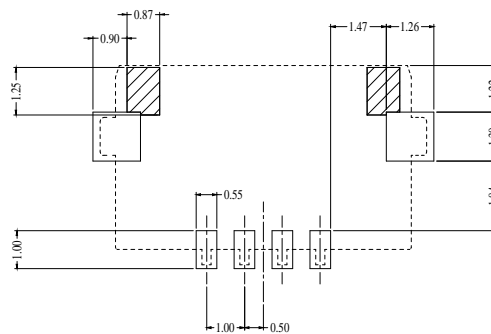
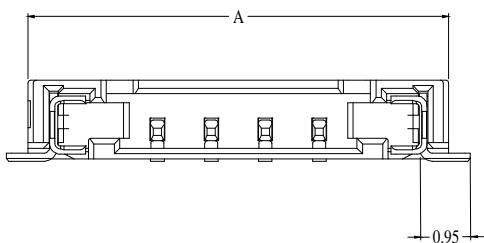
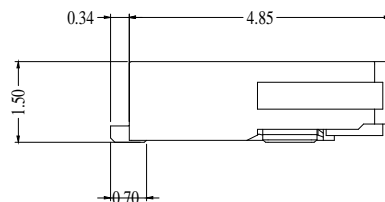



环保物料

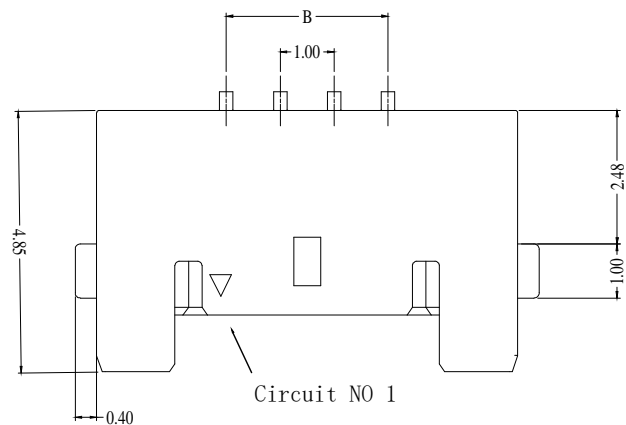


Recommended P.C.B Layout

- Specifications(规格):
 - Voltage rating(额定电压): 150V AC / DC
 - Current rating(额定电流): 1.5A AC / DC
 - Withstanding voltage(耐压值): 500V AC/minute
 - Temperature range(工作温度): -25°C~+85°C
 - Insulation resistance(绝缘电阻): 1000M
 - Contact resistance(接触电阻): 20m
 - After environmental testing(环境测试后): 40m

- Wafer (针座)
 - Part No. (料号): M1006WRS-XX
 - Poles (PIN数): 2-6
 - Material (材质): PA4T UL 94V-0
 - Pin针: Phosphor Bronze (磷铜)
 - Finish: Gold Flash (镀金)
 - 定位片: Brass (黄铜)
 - Finish: Tin-Plated (镀锡)

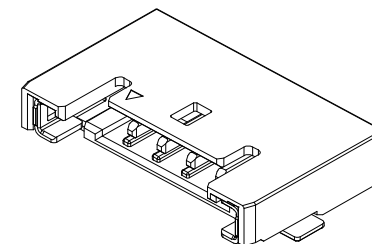

Contacts	Dimensions(mm)	
	Dim A	Dim B
2	5.80	1.00
3	6.80	2.00
4	7.80	3.00
5	8.80	4.00
6	9.80	5.00

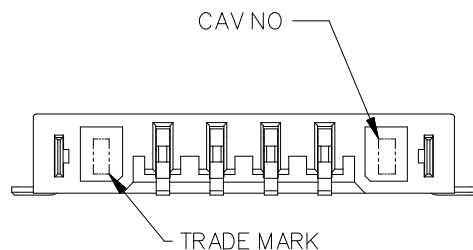

				一般公差 GENERAL TOLERANCE .X ±0.3 .XX ±0.2 .XXX ±0.1				东莞市翰皓精密电子有限公司 Dongguan HanHao Precision Electronics Co.,Ltd				料号 PART NO M1006WRS-XX			
								核准 APPD 审核 CHK 绘图 DR 日期 DATA				品名 TITLE 1.0 mm Crimp Style connectors			
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT	YANLING	SUCCESS	刘艳	2020/05/03	单位 UNIT MM	比例 SCALE 1/1	图号 NUMBER A-197	版次 REV B	